





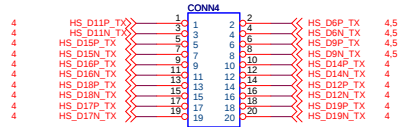


File	
X02-7000	
Size	Document Number
C	Block Diagram
Date:	Wednesday, May 20, 2015
Sheet	1 of 5
Rev	ROB



FOR HS TX

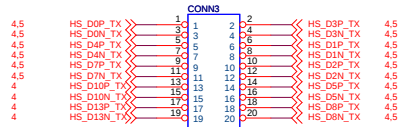



FOR LP TX

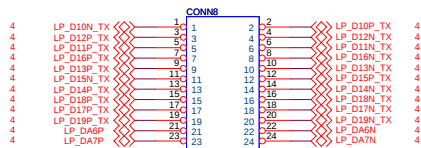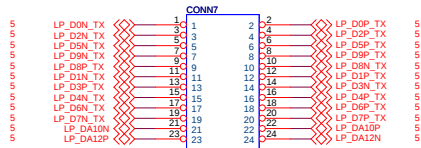






FOR HS RX

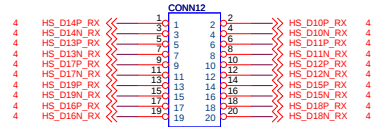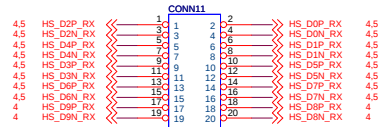

FOR LP RX

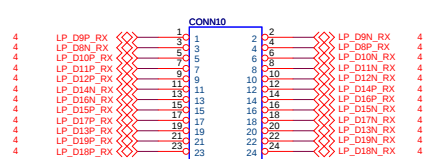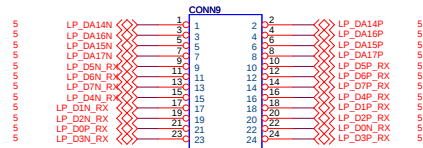


FOR LP REV TX

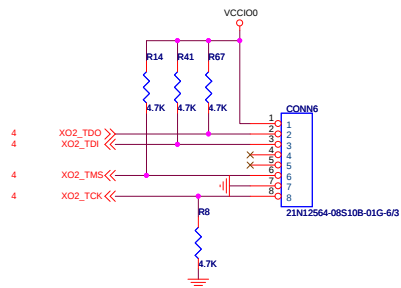


64Kbit EEPROM

Address(7bit): 1010_000 (0x50)

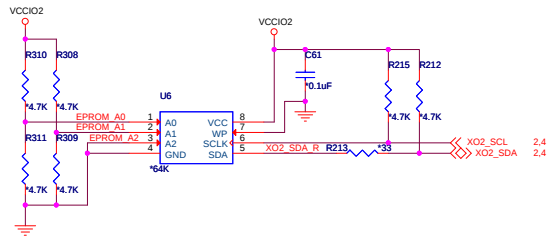


SPI Flash


4Mbit

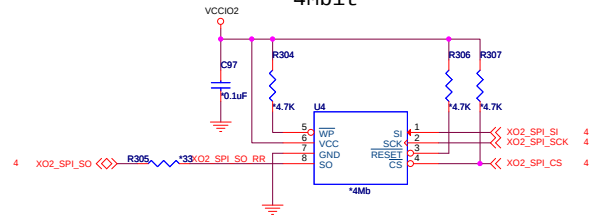


XO2 UART

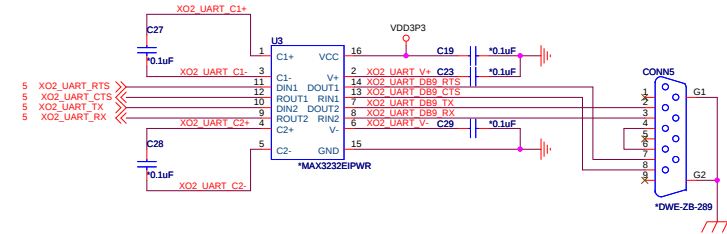


20Mhz CLK

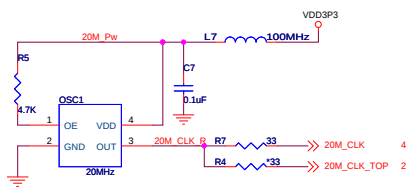


24Mhz CLK

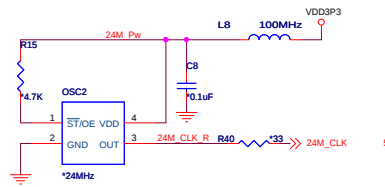


5V TO 3.3V




2.5mm DC Jack/Mini Usb

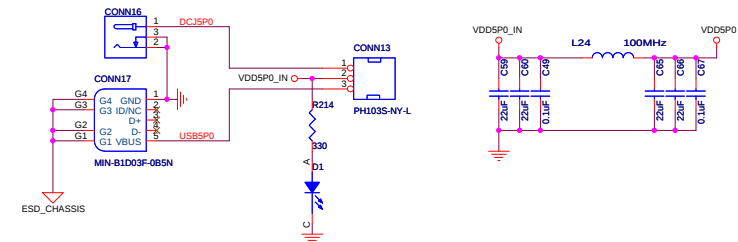


5V TO 2.5V



2.5V TO 1.2V

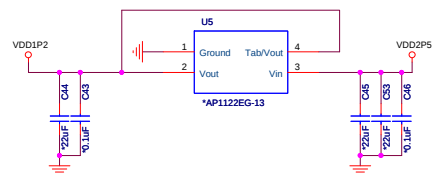

Screw



File	XO2-7000
Size	Document Number
C	PWR/EEPROM/SPI/LED/CLK
Date	Wednesday, May 20, 2015
Sheet	3 of 5
Rev	R08

